




Halogen-free 1kV power cables

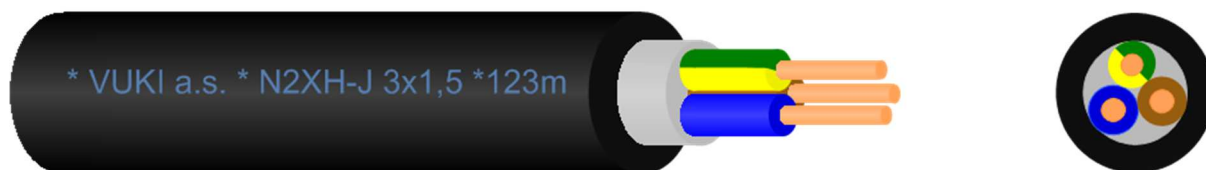

* VUKI a.s. * N2XH-J 3x1,5 *123m

Application:

Power cables with resistance to flame propagation according to STN EN 60332-3... (STN EN 50266-2-...), halogen-free, with low density of smoke according to STN EN 61034-2 and low corrosivity of combustion gases according to STN EN 50267-2-3. These are used for nominal voltage of 0,6/1 kV for fixed installation both in normal and moist environments (STN 33 2000-5-51). Cables can be used in the fire hazard conditions and can be installed on flammable material. Produced according to the standard of TŠ VUKI 21018-1.

Cable construction:

- **Number of cores:** 2 - 24
- **Cable cores:** copper conductor cl. 1 or cl. 2
- **Nominal cross-section:** 1 mm², 1,5 mm², 2,5 mm², 4 mm², 6 mm², 10 mm²
- **Insulation:** cross-linked polyethylene
- halogen-free, flame-retarding filler is placed above the coiled cores
- **Sheath cable:** halogen-free, flame-retardant material
- **Colour of sheath:** black

Technical data:

- **Nominal voltage U₀/U (kV):** 0,6/1
- **Test voltage [kV]:** 4
- **Max. short-circuit temperature:** 90 °C
- **Operating temperature:** -40 °C to +70 °C
- **Min. temperature for laying:** -5 °C
- **Min. bending radius:** 15 x cable diameter

Marking:

- **Core identification:** Acc. to STN EN 60446

- **Letter code:**

position	letter	meaning
1.	N	VDE standard
2.	2X	cross-linked polyethylene
3.	H	homo- / copolymer ethylene, HFFR
4.	RE	copper conductor cl. 1
	RM	copper conductor cl. 2



Application table:

Number of cores	Nominal cross-section	Total weight (appr.)	Outer diameter (appr.)
	mm ²	kg/km	mm
2	1	80	8,5
	1,5	90	9
	2,5	110	10
	4	150	12
3	1	100	9
	1,5	110	9,5
	2,5	155	10,5
	4	190	13
	6	310	14
	10	450	16
4	1	130	10
	1,5	150	11
	2,5	210	12
	4	290	14
	6	390	15
	10	570	17
5	1	150	10,5
	1,5	180	11,5
	2,5	240	12,5
	4	300	15
	6	400	16
	10	650	18
7	1	150	11,5
	1,5	220	12,5
	2,5	350	13,5
	4	500	17
12	1,5	400	16
	2,5	550	18
	4	700	19,5
19	1,5	520	20
	2,5	730	22
24	1,5	720	23
	2,5	950	25